




## Phonak Sky L-PR (L90/L70/L50/L30/Trial)


### Standard and Mini Earhook HE11 680 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0: 2015 / IEC 60118-0: 2022

#### Output sound pressure level

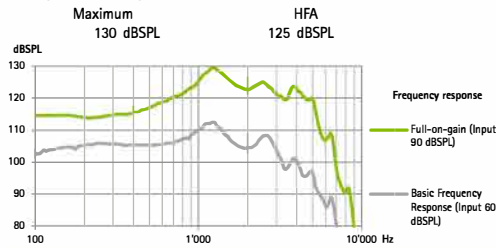

#### Acoustic gain

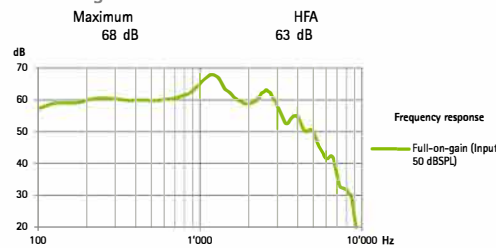


Frequency range	<100 Hz - >5700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	4.0%	3.0%	2.0%	1.0%
Expected operating time*	18 h			
Equivalent input noise level	19 dB SPL			


### SlimTube HE 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0: 2015 / IEC 60118-0: 2022

#### Output sound pressure level

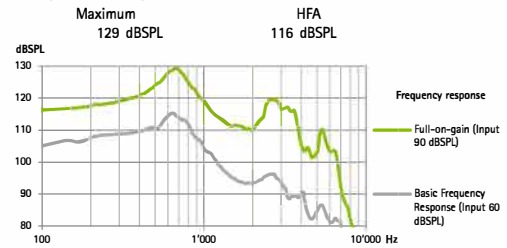

#### Acoustic gain

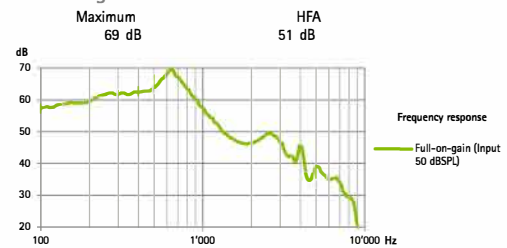

Frequency range	<100 Hz - >7100 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	2.0%	1.0%
Expected operating time*	18 h			
Equivalent input noise level	19 dB SPL			

#### General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings
- The latency of the audio signal determined according an internal standard is 6.2 ms

#### Warning

⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.



Sonova AG · Laubisrütstrasse 28  
CH-8712 Stäfa · Switzerland  
www.phonak.com

A Sonova brand

**PHONAK**  
life is on