



Model (Standard Receiver)	VI960S-DRWC* VI961-DRW* VI962-DRW*	VI760S-DRWC VI761-DRW VI762-DRW	VI560S-DRWC VI561-DRW VI562-DRW	VI460S-DRWC VI461-DRW VI462-DRW
<b>Device Configurations</b>				
Battery size 60S-DRWC	Rechargeable Lithium-Ion			
Battery size 61-DRW	312 Zinc-Air			
Battery size 62-DRW	13 Zinc-Air			
Receiver Options	LP, MP, HP, UP			
Control Options	TapControl (60S-DRWC), Push button (61-DRW and 60S-DRWC), Multi-Function button (62), Telecoil (62)			
IP Classification	IP68			
<b>Audiological Features</b>				
Channels	17	14	12	12
360 All-Around	●	-	-	-
All Access Directionality	-	●	●	-
Binaural Directionality III	-	-	-	●
Intelligent Focus**	●	-	-	-
Clear Focus***	●	-	-	-
Front Focus	-	●	-	-
Ultra Focus	-	-	●	-
Spatial Sense	●	●	●	●
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●	●	●
Synchronised Soft Switching	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings
Environmental Optimizer II	●	-	-	-
Environmental Optimizer I	-	●	●	●
Intelligent Noise Tracker****	3 Settings	-	-	-
Noise Tracker II	5 Settings	4 Settings	3 Settings	2 Settings
Wind Guard	3 Settings	3 Settings	2 Settings	2 Settings
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Expansion	3 Settings	3 Settings	2 Settings	2 Settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
<b>Functional Features</b>				
Ear-to-Ear Communication	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS***** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	-	-	-
<b>Remote Fine Tuning and Updates</b>				
ReSound Assist	●	●	●	●
ReSound Assist Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
<b>Fitting Features</b>				
Fitting Software ReSound Smart Fit™ 2.1 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●
Automatic Receiver Detection	●	●	●	●

\* VIx60S-DRWC, VIx61-DRW, and VIx62-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes  
 \*\* Intelligent Focus only available for the 60S model  
 \*\*\* Clear Focus only available for the 61 and 62 models  
 \*\*\*\* Intelligent Noise Tracker only available in the Hear in Noise program of 60S models  
 \*\*\*\*\* MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later



**Desktop charger**  
Charging form factor (CFF) 8



**Standard charger**  
Charging form factor (CFF) 8



**Premium charger**  
Charging form factor (CFF) 8



© 2024 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

402936000GB-25.01-RevC

**Worldwide Headquarters**  
GN Hearing A/S  
Lautrupbjerg 7  
DK-2750 Ballerup  
Denmark  
Tel: +45 4575 1111  
resound.com  
CVR no. 55082715

**United Kingdom**  
GN Hearing UK Ltd.  
Unit 13  
Talisman Business Centre  
Bicester  
Oxon OX26 6HR  
Tel: +44 1869 352800  
resound.com

**Australia**  
GN Hearing Australia Pty Ltd  
Suite 1001, Level 1  
1 Julius Avenue  
North Ryde, NSW 2113  
Australia  
Tel: (free) 1800 658 955  
resound.com

**New Zealand**  
GN Hearing New Zealand Limited  
Ground Floor, North Entrance  
4 Fred Thomas Drive  
Takapuna, Auckland, 0622  
Tel: (free) 0800 900 126  
resound.com

# Technical Specifications

		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler		
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz	0.6	0.7	%
	800 Hz	0.8	0.9	
	1600 Hz	1.4	1.3	
Telecoil sensitivity (1 mA/m input)*	Max.	87	90	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	92	97	
Full-on telecoil sensitivity @ 1mA/m	HFA	81	86	
Equivalent input noise, w/o Noise reduction		22	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	8	9	dB SPL
Frequency range		<200 - >8000	<200 - >8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 1.03	0.81 / 0.92	mA

\* Telecoil is only for the Vlx62-DRW models.

\*\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment. Maximum number includes no streaming; typical number includes several hours of streaming.



# Technical Specifications

		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler		
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	71 65	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	129 123	dB SPL
Total harmonic distortion	500 Hz	0.5	0.5	%
	800 Hz	0.8	0.4	
	1600 Hz	0.8	0.1	
Telecoil sensitivity (1 mA/m input)*	Max.	92	102	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	103	106	
Full-on telecoil sensitivity @ 1mA/m	HFA	86	95	
Equivalent input noise, w/o Noise reduction		21	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	8	dB SPL
Frequency range		<200 - 6590	<200 - 4650	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 0.94	0.81 / 0.87	mA



\* Telecoil is only for the Vlx62-DRW models.

\*\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment. Maximum number includes no streaming; typical number includes several hours of streaming.



Patents pending.

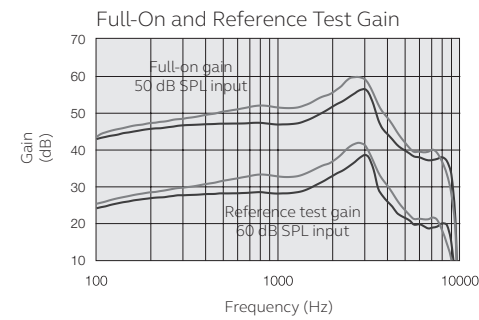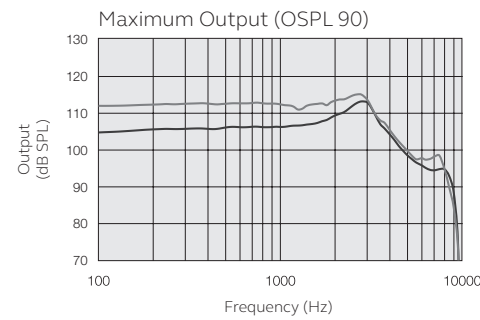

Patents pending.

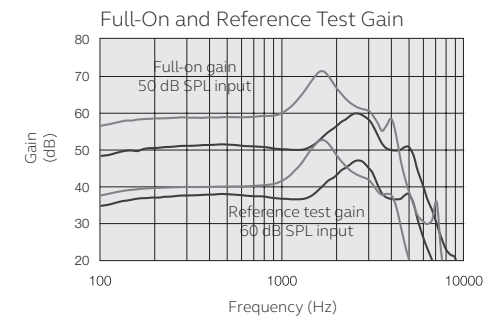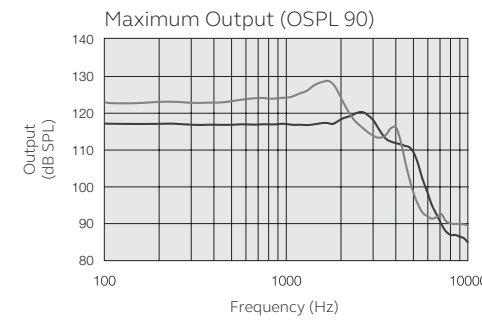

All specifications are subject to change without notice.

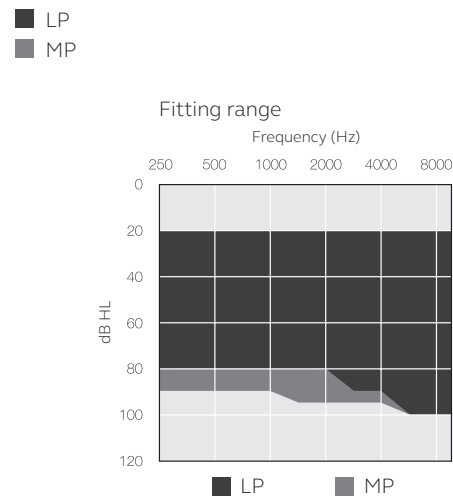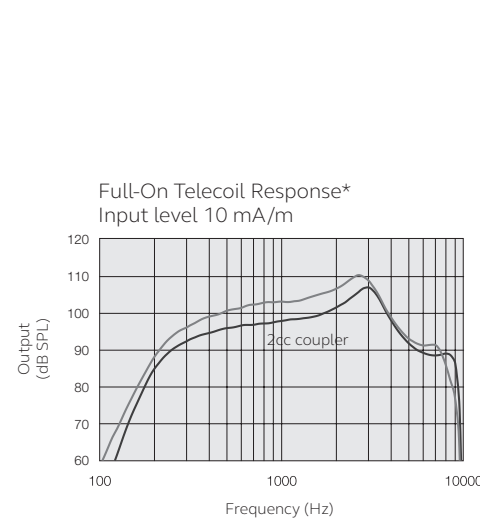

All specifications are subject to change without notice.

