




Starkey | Technical Data

CIC NW

Completely-In-Canal

Fitting Range

- L
- M
- P
- UP

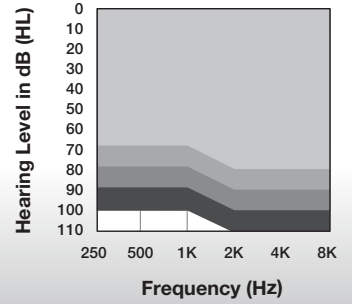

Signature Series 24

Color Guide

Faceplate Colors



Shell Colors



Patient Features

- IP Rating: 68
- Tinnitus Technology

	L	M	P	UP	Matrices: L, M, P, UP Battery Size: 10, 312
Measurement	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	ANSI/IEC 2cc Coupler	
Peak OSPL90 (dB SPL)	110	114	118	126	
HFA OSPL90 (dB SPL)	105	110	114	121	
Peak Gain (dB)	43	52	61	68	
HFA Full-On Gain (dB)	37	48	54	63	
Frequency Range (Hz)	<100-9600	<100-8300	<100-6600	<100-5900	
HFA Frequencies (kHz)	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	1.0,1.6,2.5	
Reference Test Gain (dB)	28	33	37	44	
Equivalent Input Noise (dB) ¹	25	25	25	25	
Equivalent Input Noise (dB) ²	14	14	14	14	
Harmonic Distortion					
500 Hz (%)	<3	<3	<3	<3	
800 Hz (%)	<3	<3	<3	<3	
1600 Hz (%)	<3	<3	<3	<3	
Estimated Battery Life for 16-Hour Day					
10 Zinc Air (days)	Up to 7	Up to 7	Up to 7	Up to 6	
312 Zinc Air (days)	Up to 10	Up to 10	Up to 10	Up to 9	
Battery Current (mA)	1.1	1.2	1.2	1.3	
Tinnitus Therapy Stimulus					
Max RMS Output (dB SPL)	87	87	87	87	
Weighted RMS Output Level (dB SPL)	87	87	87	87	
Max 1/3 Octave Output (dB SPL)	87	87	87	87	

¹ With expansion off

² With expansion on







Starkey | Technical Data

CIC NW

Completely-In-Canal

Signature Series 24



Latency (ms) 4.3

Attack Time (ms) 3

Release Time (ms) 60

Starkey is a trademark of Starkey Laboratories, Inc.

©2023 Starkey Laboratories, Inc. All Rights Reserved. 11/23 SPEC3076-00-EN-ST