

BTE HEARING SYSTEMS

DUO Li-Ion G6

Tech Level 16 | 12 | 8 | 6 | 4 | tune

Made for
iPhone | iPad | iPod



Battery: Lithium-Ion battery

Amplification: 60 dB (Earhook) | 60 dB (ThinTube 3.0) | 63 dB (ThinTube 3.0 P)

DUO Li-Ion G6 | Technical Data

Type	Earhook	
	2 ccm coupler	Ear simulator
Output sound pressure level		
OSPL 90 at 1.6 kHz	–	137 dB SPL
OSPL 90 (Peak)	133 dB SPL	138 dB SPL
HFA-OSPL 90	125 dB SPL	–
Gain		
FOG at 1.6 kHz	–	63 dB
FOG (peak)	60 dB	67 dB
HFA-FOG	53 dB	–
Reference test gain	48 dB	56 dB
Frequency, noise and directivity		
Frequency range TL 16	120 - 7700 Hz	940 - 7700 Hz
TL 12 8 6 4	120 - 7700 Hz	940 - 7700 Hz
Equivalent input noise	16 dB SPL	16 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	4 / 3 / 1 / 1 %	4 / 3 / 1 / – %
Tinnitus Function broadband	70 dB SPL	–
AI-DI	4.0 dB	
Inductive coil sensitivity		
MASL (1 mA/m) at 1.6 kHz	–	–
HFA MASL (1 mA/m)	–	–
HFA SPLITS (left/right)	–	–
RSETS (left/right)	–	–
HFA SPLIV	–	–
Battery		
Battery runtime (without streaming)	up to 24 h	
Battery runtime (incl. 5 h streaming)	up to 21 h	
IRIL IEC 60118-13:2016 Ed. 4.0		
700-960 MHz (rating)	user	
1400-2000 MHz (rating)	user	
2000-2700 MHz (rating)	user	
ANSI C63.19-2011		
800-950 MHz (rating)	M4	
1600-2500 MHz (rating)	M4	


Please find additional information to the values on page "Further information".

DUO Li-Ion G6 | Technical Data

Type	ThinTube 3.0		ThinTube 3.0 P	
	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator
Output sound pressure level				
OSPL 90 at 1.6 kHz	–	121 dB SPL	–	126 dB SPL
OSPL 90 (Peak)	125 dB SPL	129 dB SPL	126 dB SPL	131 dB SPL
HFA-OSPL 90	116 dB SPL	–	121 dB SPL	–
Gain				
FOG at 1.6 kHz	–	53 dB	–	59 dB
FOG (peak)	60 dB	64 dB	63 dB	68 dB
HFA-FOG	50 dB	–	56 dB	–
Reference test gain	39 dB	45 dB	44 dB	50 dB
Frequency, noise and directivity				
Frequency range TL 16	100 - 8100 Hz	100 - 9500 Hz	100 - 7200 Hz	100 - 7400 Hz
TL 12 8 6 4	100 - 8100 Hz	100 - 8300 Hz	100 - 7200 Hz	100 - 7400 Hz
Equivalent input noise	18 dB SPL	19 dB SPL	15 dB SPL	17 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	2 / 1 / 1 / 1 %	4 / 2 / 2 / – %	3 / 1 / 1 / 1 %	4 / 3 / 1 / – %
Tinnitus Function broadband	70 dB SPL	–	70 dB SPL	–
AI-DI	4.0 dB		4.0 dB	
Inductive coil sensitivity				
MASL (1 mA/m) at 1.6 kHz	–	–	–	–
HFA MASL (1 mA/m)	–	–	–	–
HFA SPLITS (left/right)	–	–	–	–
RSETS (left/right)	–	–	–	–
HFA SPLIV	–	–	–	–
Battery				
Battery runtime (without streaming)	up to 24 h		up to 24 h	
Battery runtime (incl. 5 h streaming)	up to 21 h		up to 21 h	
IRIL IEC 60118-13:2016 Ed. 4.0				
700-960 MHz (rating)	user		user	
1400-2000 MHz (rating)	user		user	
2000-2700 MHz (rating)	user		user	
ANSI C63.19-2011				
800-950 MHz (rating)	M4		M4	
1600-2500 MHz (rating)	M4		M4	


Please find additional information to the values on page "Further information".

DUO Li-Ion G6 | Fitting Range



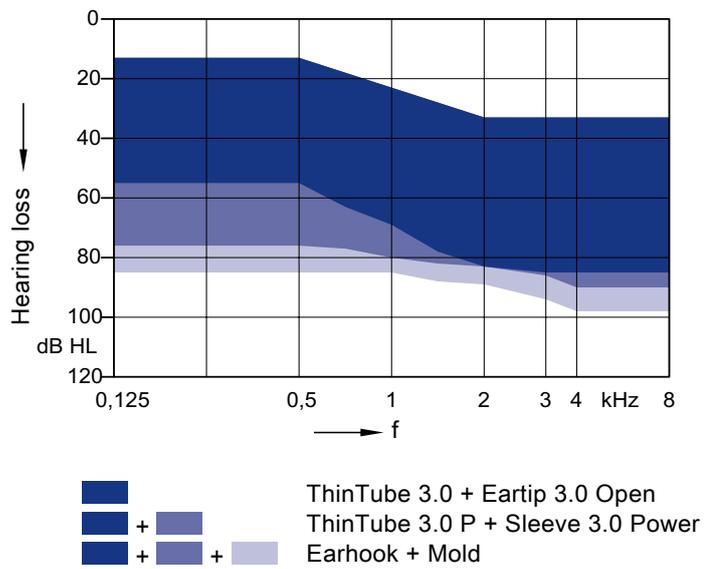


Earhook | Basic Data

2 ccm coupler

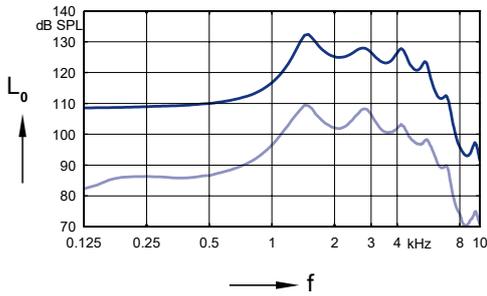


Ear simulator

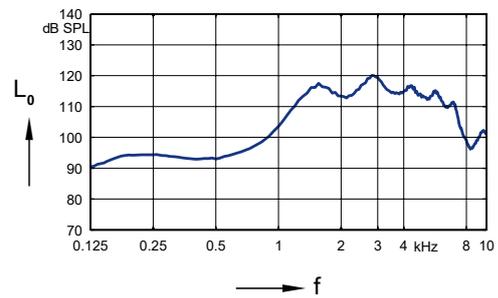
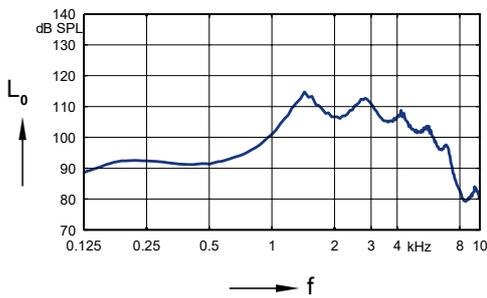
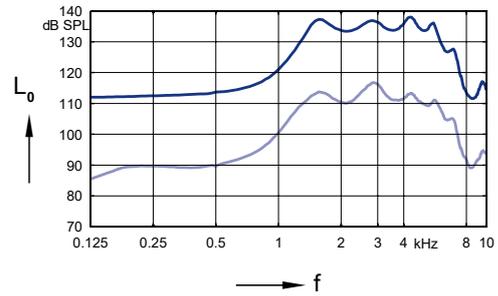


ThinTube 3.0 | Basic Data

2 ccm coupler

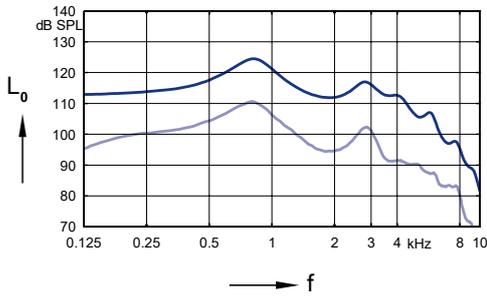


Ear simulator

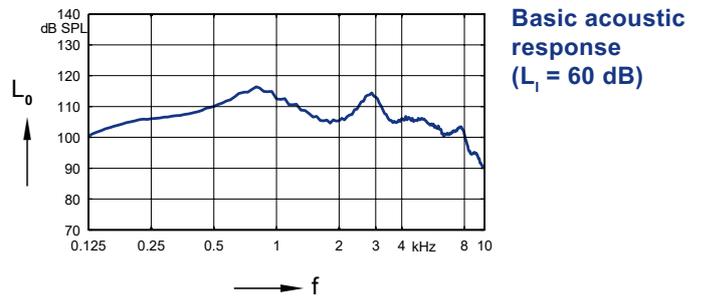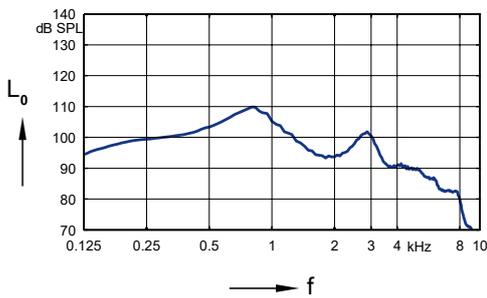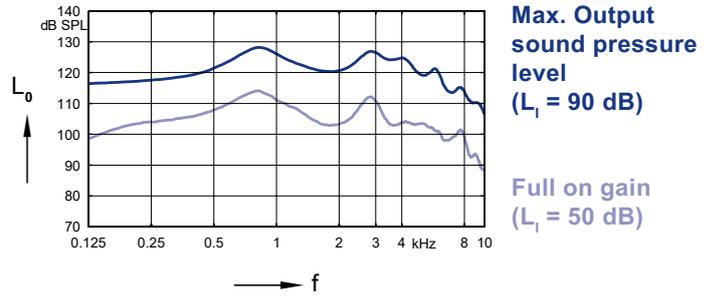

ThinTube 3.0 P | Basic Data


2 ccm coupler

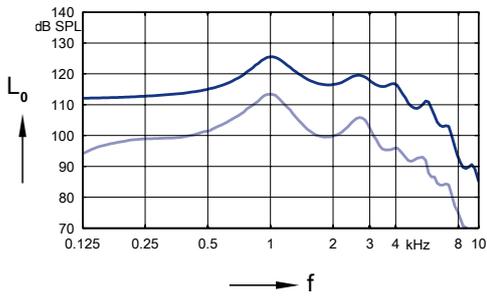

Max. Output sound pressure level
(L_i = 90 dB)


Full on gain
(L_i = 50 dB)

Ear simulator

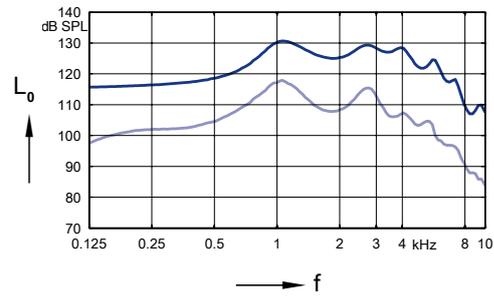


Max. Output sound pressure level
(L_i = 90 dB)

Full on gain
(L_i = 50 dB)

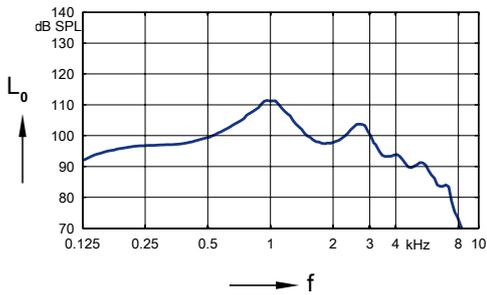

Frequency response
(L_i = 60 dB)

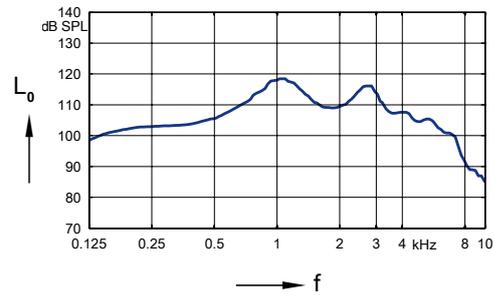

Basic acoustic response
(L_i = 60 dB)

DUO Li-Ion G6 | Features and Accessories

	TL 16	TL 12	TL 8	TL 6	TL 4
Features					
Channels / Controls / Programs	48 / 20 / 6	32 / 16 / 6	24 / 12 / 6	16 / 8 / 4	16 / 8 / 4
Comformatic	HiRes	HiRes	HiRes	HiRes	HiRes
Occlumatic	●	●	●	—	—
Direct Audio Streaming / Auto Volume	Made for iPhone, Android via Smart Mic / Auto Volume	Made for iPhone, Android via Smart Mic / Auto Volume	Made for iPhone, Android via Smart Mic / Auto Volume	Made for iPhone, Android via Smart Mic / Auto Volume	Made for iPhone, Android via Smart Mic / Auto Volume
Binaural Synchronization	●	●	●	●	●
Directionality	Automatic/ Adaptive, Panorama, Front/Back, Left/Right, Advanced Narrow	Automatic/ Adaptive, Panorama, Front/Back, Narrow	Automatic/ Adaptive, Panorama, Narrow	Automatic/ Adaptive, Panorama	Automatic/ Adaptive, Panorama
Noise Reduction	Noise Management, Impulse suppressor, Directional	Noise Management, Impulse suppressor, Directional	Noise Management, Impulse suppressor, Directional	Noise Management, Impulse suppressor	Noise Management
Wind Noise Reduction	Binaural	Binaural	Standard	Standard	Standard
EchoClear / Dereverberation	●	—	—	—	—
HiFi functionality / Selective frequency compression	● / ●	— / ●	— / ●	— / ●	— / ●
Music	Live, Musicians, Sound carriers	Live, Musicians, Sound carriers	MusicSelect	MusicSelect	—
Tinnitus	Sound Therapy, Notch Therapy	Sound Therapy, Notch Therapy	Sound Therapy, Notch Therapy	Sound Therapy	—
2earPhone	●	●	●	—	—
Acclimatic / Data Logging	Intelligent / ●	Intelligent / ●	● / ●	● / ●	● / ●
T-Coil	—	—	—	—	—
Small earhook	○	○	○	○	○
Ingress Protection Rating	IP68	IP68	IP68	IP68	IP68
Accessories					
Charging Station	Mandatory	Mandatory	Mandatory	Mandatory	Mandatory
Smart Key	○	○	○	○	○
Smart Transmitter 2,4	○	○	○	○	○
Smart Mic	○	○	○	○	○
Audio Service App	○	○	○	○	○
CROS RIC G6	○	○	○	—	—
CROS RIC Li-Ion G6	○	○	○	—	—
CROS quiX G6	—	—	—	—	—

● available — not available ○ optional

DUO Li-Ion G6 | Further information

Abbreviations

The following abbreviations are used in this datasheet:

SPL	Sound Pressure Level
OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full-On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
SPLIV	SPL In a Vertical magnetic field
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

Standards and additional information

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2014 and IEC 60118-0:2015 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1:1994 and to DIN 45605 (frequency range) if applicable.
- ▶ Curves and figures representing FOG are measured with 20 dB reduction and 70 dB SPL input level.
- ▶ Figures representing Equivalent Input Noise incorporate a moderate expansion.
- ▶ Tinnitus noiser measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.
- ▶ Inductive coil sensitivity values, inductive response curves and T ratings apply for instruments with telecoil only.
- ▶ The current consumption is measured in reference test setting (RTS) according to the applicable standards. Due to the settling behaviour of hearing instruments supporting RF (radio frequency), the battery current is measured 3 minutes after turning on (note: no pairing).
- ▶ The battery runtime is based on first fit settings using 60 % of the fitting range and an ISTS (International Speech Test Signal) input signal at 65 dB SPL (note: pairing established). The actual battery runtime is determined by battery quality, hearing loss, sound environment, usage and activated feature set. Regarding RF usage (Bluetooth streaming) two different conditions are considered.
- ▶ Extended bandwidth up to 10 kHz for TL 16 devices only.
- ▶ The following acoustic connections / ear pieces were used:
 - Earhook
 - ThinTube 3.0
 - ThinTube 3.0 P

Special note for instruments with built-in lithium-ion rechargeable battery

- ▶ The runtime of all lithium-ion rechargeable batteries reduces over time. The estimates are based on fresh lithium-ion rechargeable battery capacity. Under normal operating conditions, the battery will retain up to 80 % of its initial capacity after 2 years of use. Please note that battery performance will vary depending on individual usage patterns and environmental conditions.



“Made for iPod”, “Made for iPhone”, and “Made for iPad” mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice. The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

 **Legal Manufacturer**
WSAUD A/S
Nymøllevej 6
3540 Lyngø
Denmark


0123

Order No. 04514-99T02-7600
© 04.2021, WSAUD A/S
All rights reserved

Subject to change
without prior notice

www.audioservice.com



WARNING

Choking hazard posed by small parts.

- ▶ This instrument is not intended for the fitting of infants, children under 3 years or persons of mental incapacity.



WARNING

Instrument has an output sound pressure level of 132 dB SPL or more. Risk of impairing the residual hearing of the user.

- ▶ Take special care when fitting this instrument.